Interior Lighting







LED Strip Lights with Switch

Dome Light - Round

Dome Light - Rectangular



- Low current draw.
- Multi-voltage.
- Easy installation.
- Slimline design.
- Polycarbonate construction.
- Frosted lens for diffused light.
- Optional mounting brackets available.
- 5-year warranty.



Operational Voltage:


Lens:
Body:
Weight:
Connector:
Light Source:
Operating Temperature:

10–30V Polycarbonate Polycarbonate 0.05kg 250mm Fly Lead 6 x LEDs -20°C to 60°C







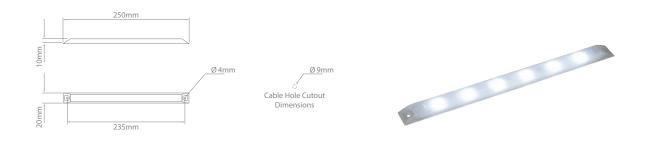


LED Strip Light

 Part No.
 Operational Voltage
 No. of LEDs
 Lumen
 Current Draw (A) @ 12V

 INT250
 10-30
 6
 420
 0.4

Not recommended for mounting on synthetic surfaces.



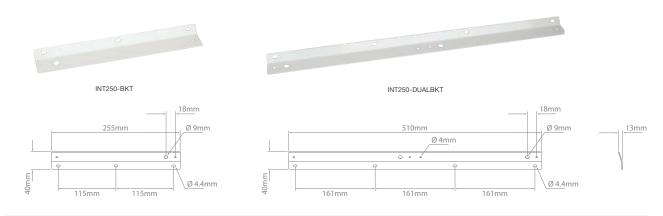

LED Strip Light - Mounting Brackets

Part No. Description

INT250-BKT Powder coated steel, suits 1 x INT250
INT250-DUALBKT Powder coated steel, suits 2 x INT250






- Incorporated latching push button ON/OFF switch.
- High output LEDs.
- Low current draw.
- Multi-voltage.
- Easy installation.
- Slimline design.
- Polycarbonate construction.
- Epoxy sealed for vibration & moisture resistance.
- 5-year warranty.






Operational Voltage : Lens : Body : Connector : Light Source : Operating Temperature : 12–24V Polycarbonate Polycarbonate 100mm Fly Lead LED -30°C to 50°C







LED	Strip	Lights	with	Switch
	Ourib	Ligitus	VVICII	OVVICCII

Part No.	Operational Voltage	No. of LEDs	Lumen	Current Draw (A) @12V	Weight (kg)
EBLED20	12–24	9	110	0.2	0.05
EBLED40	12-24	18	220	0.4	0.09



ionnic.com










The IONNIC website – for all the most up to date products and info



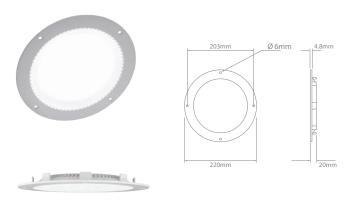





Dome Light - Round - Recessed Mount



Part No. Operational Voltage No. of LEDs Lumen High Output Low Output 8052-0000-30 10-16 21 1,000 0.6 1.2




- Extreme light output 2,300 Lumen.
- Multi-voltage.
- Easy installation.
- Slimline design
- Polycarbonate lens.
- Frosted lens for diffused light.
- Environmentally sealed IP67.
- Epoxy sealed for vibration & moisture resistance.
- 5-year warranty.

Operational Voltage:
Lens:
Body:
Weight:
Connector:
Ingress Protection:
Operating Temperature:
Colour Temperature:
Approvals:

10–30V Polycarbonate Polycarbonate 0.95kg 460mm Fly Lead IP67 -30°C to 50°C 6000K CE











Dome Light - Rectangular - Surface Mount

 Part No.
 Operational Voltage
 No. of LEDs
 Lumen
 Current Draw (A)

 ECLED30
 10-30
 12
 2,300
 2.2

