


LED Interior Lighting



LED Interior Lighting




LED Strip Light **86**



LED Strip Lights with Switch **88**



Dome Light - Round **90**

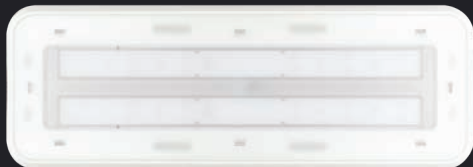

Dome Light - Rectangular **91**

LED Interior Lighting

LED Strip Light



- High output LEDs.
- Low current draw.
- Multi-voltage.
- Easy installation.
- Slimline design.
- Polycarbonate construction.
- Frosted lens for diffused light.
- Optional mounting brackets available.
- 5-year warranty.


10V
30V 5Yrs

Operational Voltage :	10–30V
Lens :	Polycarbonate
Body :	Polycarbonate
Weight :	0.05kg
Connector :	250mm Fly Lead
Light Source :	6 x LEDs
Operating Temperature :	-20°C to 60°C

Ultra Wide 180° Light Dispersion


Compact and easy to install the LED Strip Light produces a remarkable 180° of even, diffused light, to comfortably illuminate large vehicle interiors and compartments.

Ideal for commercial vehicles, canopies, service bodies, lockers, marine applications and more.



Example of one Strip Light installed illuminating an entire canopy.


LED Interior Lighting

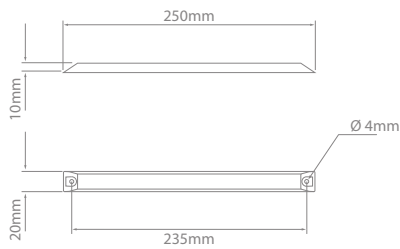

LED Strip Light

Part No.	Operational Voltage	No. of LEDs	Lumen	Current Draw (A) @ 12V
INT250	10–30	6	420	0.4

Not recommended for mounting on synthetic surfaces.

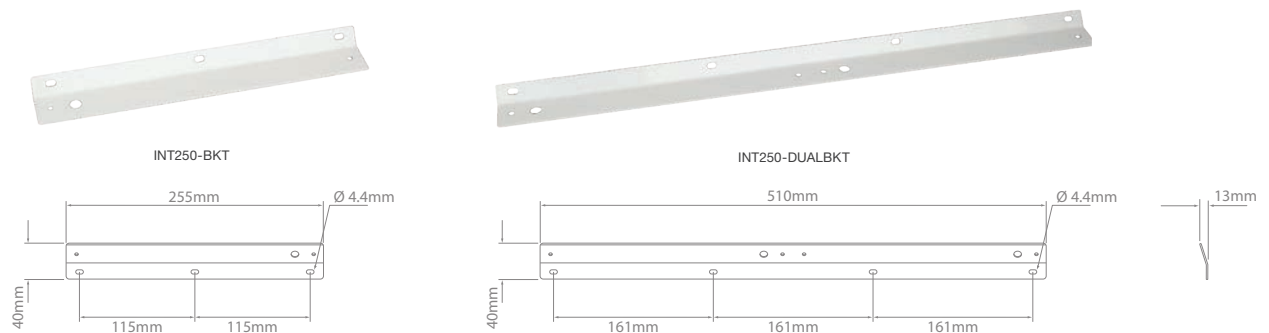

LED Strip Light – Mounting Brackets

Part No.	Description
INT250-BKT	Powder coated steel, suits 1 x INT250
INT250-DUALBKT	Powder coated steel, suits 2 x INT250



LED Interior Lighting

LED Strip Lights with Switch

12V
24V

5Yrs



- Incorporated latching push button ON/OFF switch.
- High output LEDs.
- Low current draw.
- Multi-voltage.
- Easy installation.
- Slimline design.
- Polycarbonate construction.
- Epoxy sealed for vibration & moisture resistance.
- 5-year warranty.

Operational Voltage :

12-24V

Lens :

Polycarbonate

Body :

Polycarbonate

Connector :

100mm Fly Lead

Light Source :



LED

Operating Temperature :

-30°C to 50°C



Integrated latching push button ON/OFF switch

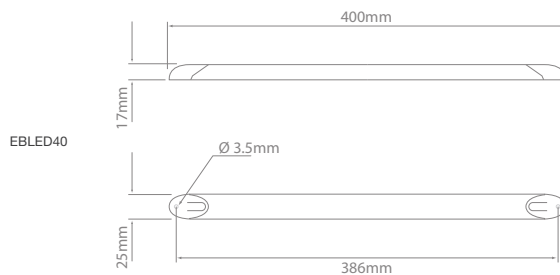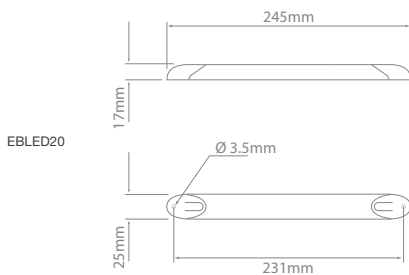


LED Strip Lights with Switch

Part No.	Operational Voltage	No. of LEDs	Lumen	Current Draw (A) @ 12V	Weight (kg)
EBLED20	12-24	9	110	0.2	0.05
EBLED40	12-24	18	220	0.4	0.09

ionnic.com



Visit website

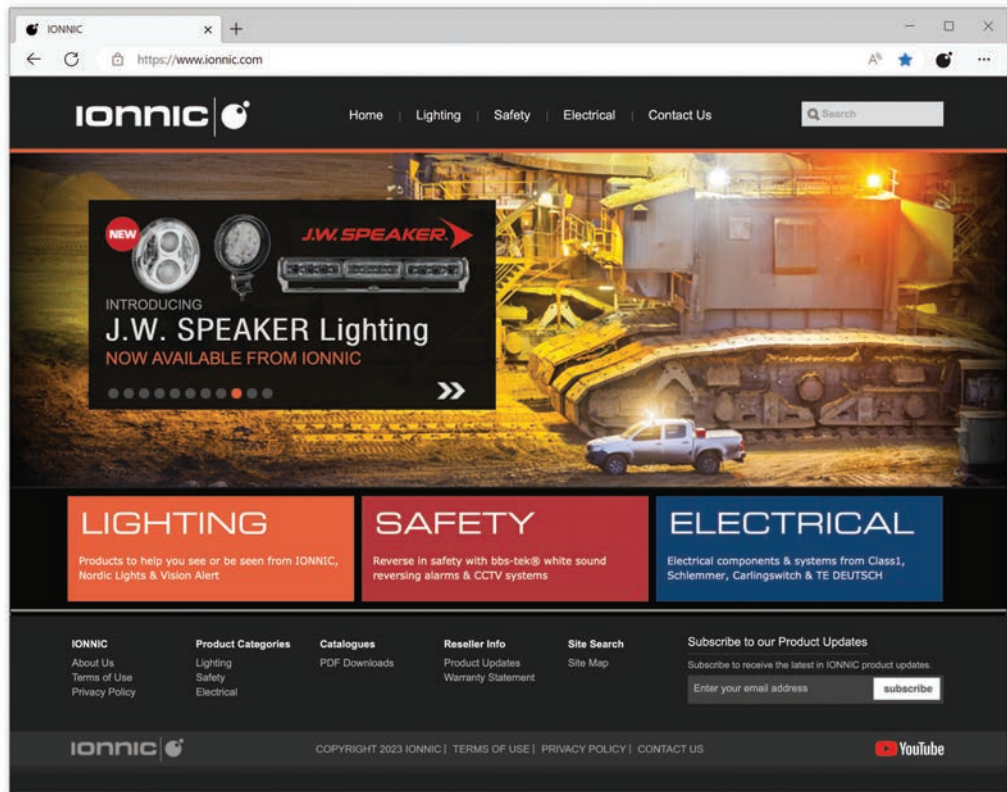

Check out the entire range of Worklamps

The IONNIC website – for all the most up to date products and info

LED Interior Lighting

Dome Light – Round



NEW



- Meets GSA-KKK and NFPA 1917 standards for illumination, when installed according to manufacturer's specifications.
- Ultra slim design, protrudes less than 4.8mm.
- Each unit colour temperature checked to 4100K for accurate skin tone rendering.
- Robust cast alloy body.
- Even, consistent & wide angle 1,000 lumen output.
- Output can be adjustable with PWM (Pulse Width Modulation) dimmer.
- Integrated cooling fins.
- Made in North America.
- 5-year warranty.

5Yrs **Made in North America**

Operational Voltage : 10–16V
 Lens : Acrylic
 Body : Aluminium
 Weight : 0.6kg
 Connector : 300mm Fly Lead
 Operating Temperature : -40°C to 65°C
 Colour Temperature : 4100K
 Approvals : UL, GSA-KKK, NFPA 1964

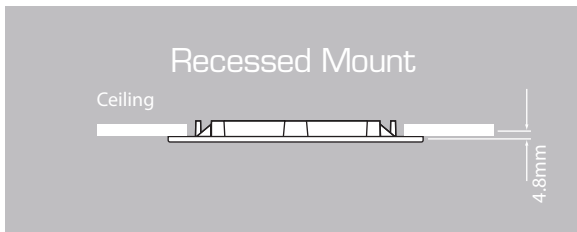

GSA-KKK & NFPA 1917 Compliant

Meets GSA-KKK and NFPA 1917 standards for illumination, when installed according to manufacturer's specifications.




Dome Light – Round – Recessed Mount **NEW**

Part No.	Operational Voltage	No. of LEDs	Lumen	Current Draw (A)	
				Low Output	High Output
8052-0000-30	10–16	21	1,000	0.6	1.2


LED Interior Lighting

Dome Light – Rectangular

- Extreme light output – 2,300 Lumen.
- Multi-voltage.
- Easy installation.
- Slimline design
- Polycarbonate lens.
- Frosted lens for diffused light.
- Environmentally sealed – IP67.
- Epoxy sealed for vibration & moisture resistance.
- 5-year warranty.

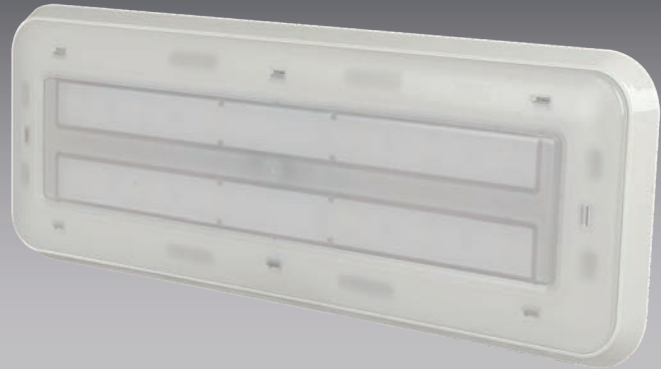

Operational Voltage : 10–30V
 Lens : Polycarbonate
 Body : Polycarbonate
 Weight : 0.95kg
 Connector : 460mm Fly Lead
 Ingress Protection : IP67
 Operating Temperature : -30°C to 50°C
 Colour Temperature : 6000K
 Approvals : CE

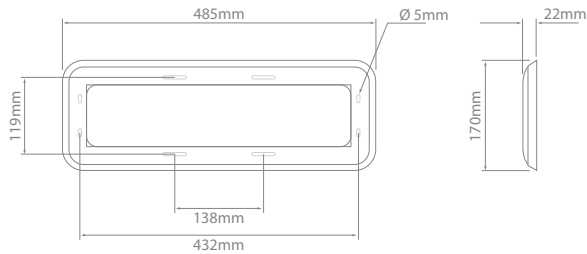

Dome Light – Rectangular – Surface Mount

Part No.	Operational Voltage	No. of LEDs	Lumen	Current Draw (A)
ECLED30	10–30	12	2,300	2.2

