Lightbans







IONNIC Blade - Micro 48

IONNIC LED Nano-Bar 50

Rotating LED Mini-Bar 51

LED Blaze 53

IONNIC Blade 56

IONNIC Blade - Mini 59








- Dual colour models available.
- Compact & low profile LED lightbar.
- High output 1 Watt LEDs.
- Up to 17 flash patterns.
- Magnetic version features cigar plug with integrated on/off (high or low output) & pattern select switches.
- Polycarbonate lens for high durability.
- Multi-voltage.
- Environmentally sealed IP67.
- Breather filter technology to prevent ingress.
- 3-year warranty.


Voltage: Max. Current Draw: 4.5A @ 12V Mount: 2 x M8 Bolts / Magnetic Lens: Polycarbonate ABS Base: Light Source: 1W LEDs SAE Class 1, ECE R10, ECE R65 Class 2 Approvals: Ingress Protection: -40°C to 60°C **Operating Temperature:**

















IONNIC Blade - Micro - 2 Bolt



IL-0110

Blue

Green

Magenta

Red

Coloured Lens Clear Lens

IL-011C

IL-033C


IL-044C

IL-066C

IL-055C

Supplied with mounting hardware. 600g. Cable length – 0.4m.

16 flash patterns.









IONNIC Blade - Micro - Magnetic 🐷



Coloured Lens

IL-0110-M


IL-011C-M Clear Lens

900g. Cable length – 3.4m. 16 flash patterns.



Dual Colour







IONNIC Blade - Micro - 2 Bolt - Dual Colour 🐷



Clear Lens

IL-088C

IL-077C

Amber/Red IL-099**C**

Supplied with mounting hardware. 600g. Cable length – 0.4m.

17 flash patterns.






- One of the smallest LED lightbars on the market - 165mm long.
- 14 flash patterns.
- Magnetic version features cigar plug with integrated on/off & pattern select switches.
- · Latest high output LED technology.
- · Robust housing and lens.
- Can be synchronised.
- Multi-voltage.
- Full 360° light dispersion.
- Environmentally sealed LED modules IP67.
- 5-year warranty.



12-30V Voltage: Max. Current Draw : Flash Patterns : 4A @ 12V 14 4 x M5 Bolts / Magnetic Mount: Lens: Polycarbonate Housing: Aluminium Weight: 1.0kg Light Source: 3W LEDs IP67 -40°C to 60°C Ingress Protection: **LED Modules** Operating Temperature:







(©) IONNIC LED Nano-Bar – 4 Bolt

LSQ-0110

LSQ-0330

LSQ-0440

Magenta **LSQ**-0660

LSQ-0550

LSQ-0SS0

Red/Blue LSQ-0770

Supplied with 4 x M5 bolts, nuts, split ring & washers.

0.6kg. Cable length - 0.4m.

Dual colour models - Only the rotation flash pattern alternates between the two colours. The remaining flash patterns operate in the selected singular colour.





IONNIC LED Nano-Bar - Magnetic

Green

Magenta

Red

Red/Blue

LSQ-0110-M

LSQ-0330-M

LSQ-0440-M

LSQ-0660-M

LSQ-0550-M

LSQ-0770-M


Supplied with drawstring carry bag. 1.1kg. Cable length – 3.0m

Dual colour models - Only the rotation flash pattern alternates between the two colours. The remaining flash patterns operate in the selected singular colour.

- True rotating LED.
- Heavy-duty, virtually unbreakable.
- Patented 'Hybrid Drive' technology. No gears, no belts, no brushes.
- SAE Class 1 rated output.
- Die-cast metal base.
- LEDs rated to 50,000 hours of operation.
- Low current draw.
- UV hard-coated polycarbonate lens.
- Multi-voltage.
- 5-year warranty.

Current Draw: Mount: Base: Light Source : Approvals: **Operating Temperature:**

Ingress Protection:










Rotating LED Mini-Bar













Rotating LED Mini-Bar - 4 Bolt




YouTube Channel

Product videos, configuration tutorials and more





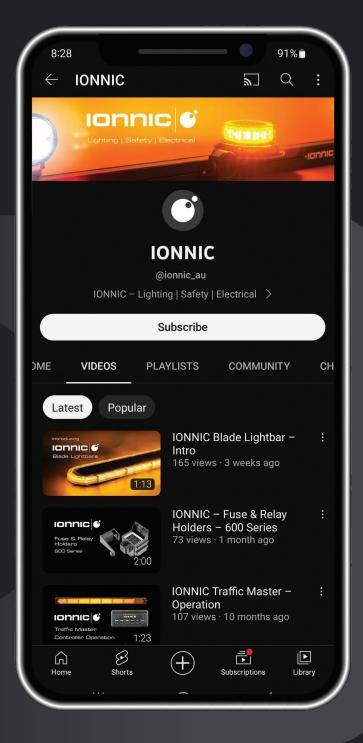

- Features 103 Series LED beacons.
- Latest high output LED technology.
- Low current draw.
- Robust polycarbonate base and lens.
- Available in 6 lens colours. Other colour combinations available upon request.
- Available with clear lens and coloured LEDs.
- Multi-voltage.








Voltage : Current Draw : Light Source : Mount: Lens: Base:

2 x 13mm Bolts Polycarbonate Polycarbonate Ingress Protection: LED Beacons IP67

12-24V 6.4A @ 12V LED

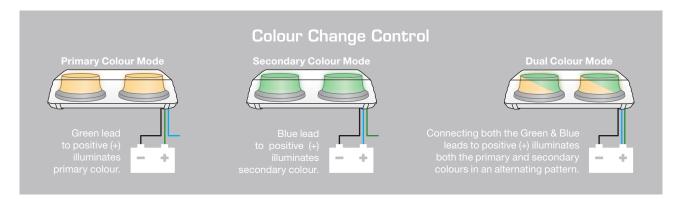






Introducing

Ionnic 6 Blade Lightbars









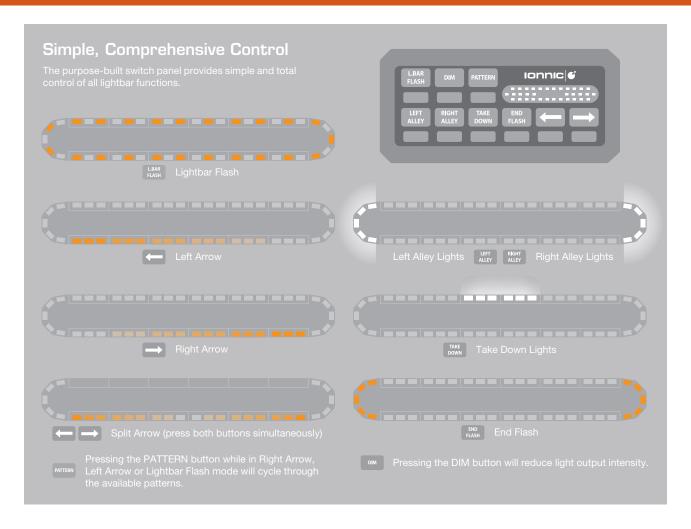



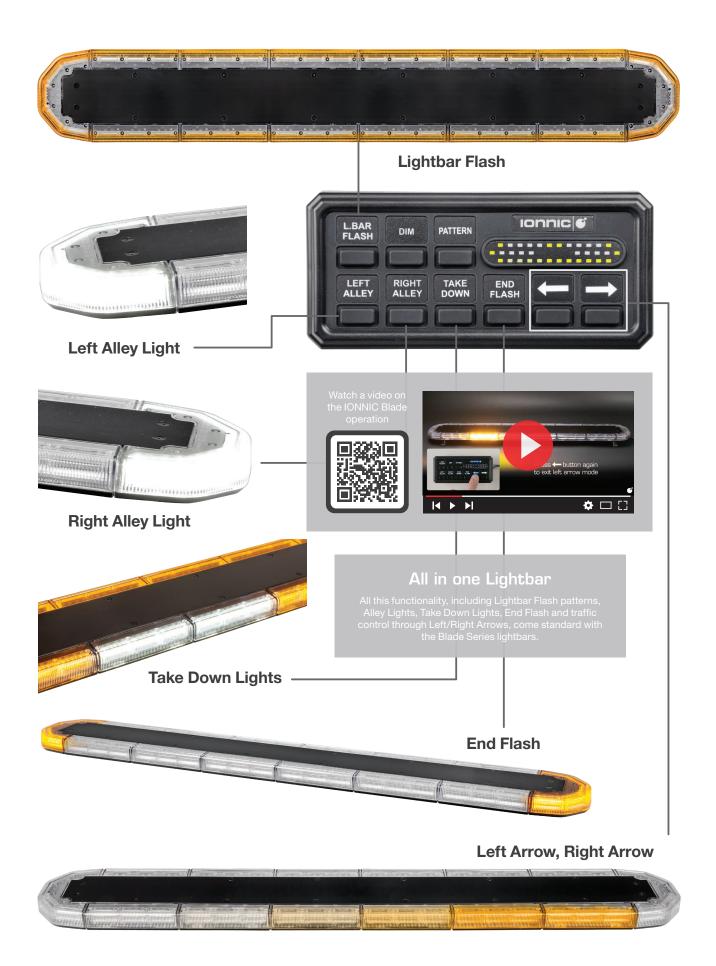



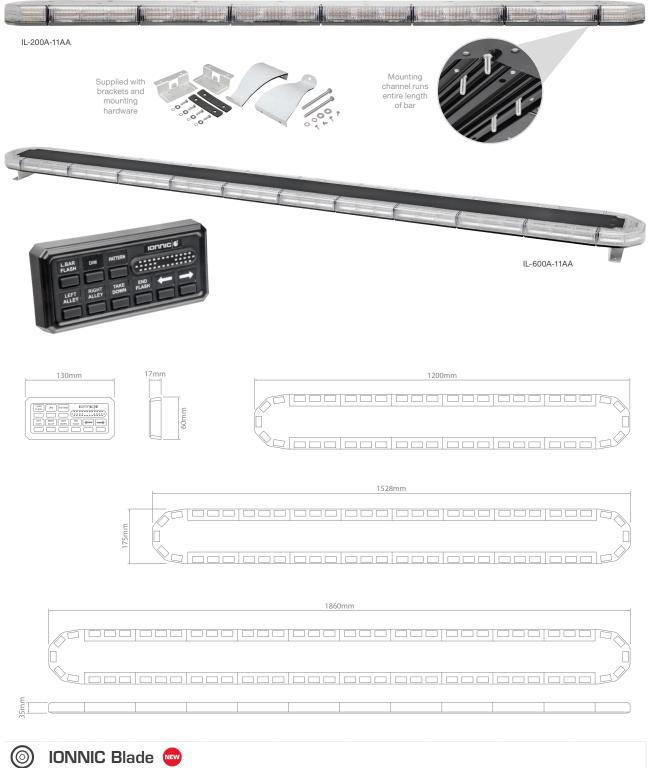



1200mm 23A @ 12V IL-200A-11AA IL-233A-11AA IL-244A-11AA IL-266A-11AA IL-255A-11AA IL-277A-11AA IL-288A-11AA 1528mm 29A @ 12V IL-400A-11AA IL-433A-11AA IL-444A-11AA IL-466A-11AA IL-455A-11AA IL-477A-11AA IL-488A-11AA 1860mm 35A @ 12V IL-600A-11AA IL-633A-11AA IL-644A-11AA IL-666A-11AA IL-655A-11AA IL-677A-11AA IL-688A-11AA

 $Supplied \ with \ switch \ panel, \ brackets \ and \ mounting \ hardware \ including \ universal \ gutter \ mount.$

 ${\bf Colour\ combinations\ available\ upon\ request,\ lead\ times\ apply.}$

All lenses are clear.





- Low profile 35mm.
- Polycarbonate lens for high durability.
- Environmentally sealed IP67.
- Breather filter technology to prevent ingress.
- Dimming function.
- Multi-voltage.
- 3-year warranty.

Voltage: 10-30V 4 x M6 Bolts Mount: Polycarbonate Lens: Base: Aluminium Light Source: 1W LEDs Cable Length: 3.1m 2.6kg Weight: SAE Class 1, ECE R10 IP67 Approvals : Ingress Protection : Operating Temperature : -40°C to 60°C




















532mm

IONNIC Blade - Mini



Max. Current Draw Length

IL-1110-0

Blue IL-1330-0

Green IL-1440-0

Magenta IL-1660-0

Red IL-1550-0

Red/Blue IL-1770-0 Amber/Green IL-1880-0

Supplied with brackets and mounting hardware.

11A @ 12V

Colour combinations available upon request, lead times apply.

All lenses are clear.

