

# Nordic Heavy Duty HID




# Nordic Heavy Duty HID

---



N45 HID 44





# Nordic Heavy Duty HID

N445 HID



- High output 45W ballast produces 60% more light compared to standard ballasts.
- Heavy duty Xenon discharge bulb.
- Low current draw.
- Over voltage, over temperature, spike & polarity protected.
- Heavy duty anti-vibration mounting system.
- Free-Form optics for superior light dispersion.
- Replaceable lens.
- Rotate lens for pendant mount.
- Environmentally sealed cast alloy body.
- Breather filter protects against water and dust ingress.
- Ballast encapsulated in body.
- TE DEUTSCH compatible connector encapsulated in body.


Voltage :	12V	24V
Start Up :	8A	3.5A
Current Draw :	3A	1.5A
Ballast :	45W Integrated	
Connector :	DT Style – 2 Pin	
Mount :	Single Bolt M10	
Shock :	50G	
Vibration :	20G rms 24–2000Hz	
Lens :	Hardened Glass	
Body :	Aluminium	
Weight :	1.2kg	
Ingress Protection :	IP68, IP6K9K	
Salt Mist :	ISO 9227	
EMC :	ISO 13766	
Operating Temperature :	-40°C to 85°C	
Colour Temperature :	4250K	
Tube :	35W D1S	



# Nordic Heavy Duty HID


## N45 HID – Flood

Part No.	Voltage
<b>990-058</b>	12
<b>990-039</b>	24

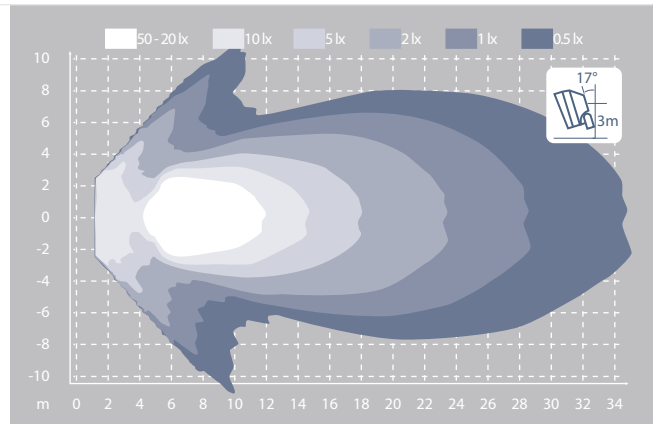

## N45 HID – Wide Flood

Part No.	Voltage
<b>990-054</b>	12
<b>990-040</b>	24

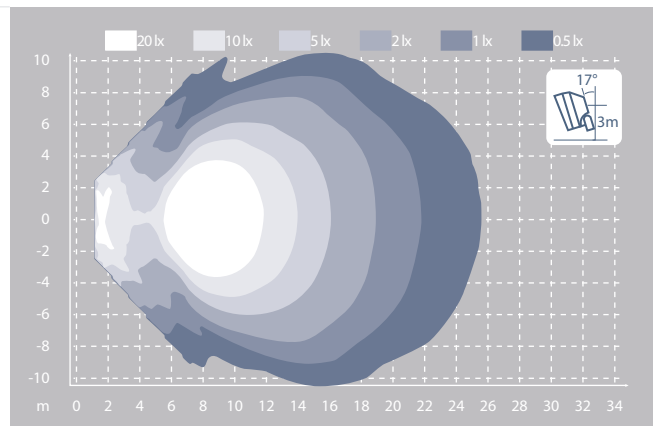

## N45 HID – High Beam (Spot)

Part No.	Voltage
<b>990-059</b>	12
<b>990-038</b>	24

