


# Switches

- Vandal resistant momentary or latching switches.
- LED illumination.
- Highly impact resistant.
- Variety of illumination colours available
- Environmentally sealed – IP65 (face only).



L16-RR-DC



L16RR



L22HD-RL12V

Current Rating : 2A  
High Current 20A

Contacts : Silver Alloy




Body : Stainless Steel

Ingress Protection : IP65 (face only)

Approvals : CE, RoHS



Vandal Resistant Switches

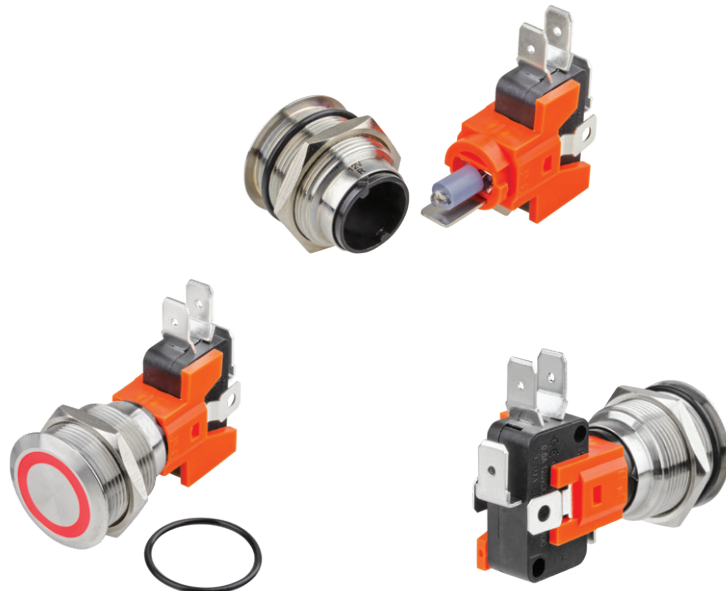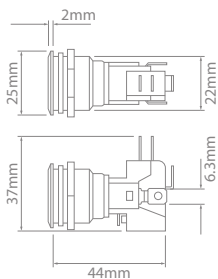

## Vandal Resistant Switches – High Current

Size (mm)	Max. Panel Thickness (mm)	Function	Contact Type	Red Illumination	
				12V	24V
22	13	Latching	N/O & N/C	L22HD-RL12V	L22HD-RL24V
22	13	Momentary	N/O & N/C	L22HD-RM12V	L22HD-RM24V







Fig 1




Fig 2

16mm





Fig 3



Fig 4

NEW

19mm





Fig 5

22mm

### Vandal Resistant Switches

Size (mm)	Voltage	Max. Panel Thickness (mm)	Function	Contact Type	Fig	Illumination			
						Red	Green	Amber	Blue
16	12-24	10	Momentary	N/O & N/C*	1	<b>L16-RR-DC</b>	—	—	—
16	12-24	10	Momentary	N/O & N/C	2	<b>L16-RR</b>	<b>L16-RG</b>	<b>L16-RA</b>	<b>L16-RB</b>
19	12-24	10	Momentary	N/O & N/C	3	<b>L19-RR</b>	<b>L19-RG</b>	<b>L19-RA</b>	<b>L19-RB</b>
19	12-24	10	Momentary	N/O & N/C	4	<b>L19TF-RR</b>	—	—	<b>L19TF-RB</b>
19	12-24	10	Latching	N/O & N/C	4	—	—	—	<b>L19TF-RB-L</b>
22	12-24	8	Momentary	D/M & D/B	5	<b>L22-RR</b>	<b>L22-RG</b>	<b>L22-RA</b>	<b>L22-RB</b>

\*L16-RR-DC is double pole.



### Vandal Resistant Switches – Accessory

Part No.	Description	Suits
L16-PLUG	Push on plug with 15cm fly leads	16mm