

NIGHT RANGER Series

— with white and amber position lights —



ionnic | 

Lighting | Safety | Electrical

For details of your nearest reseller free call : 1800 724 690 | www.ionnic.com

IONNIC LED Driving Lights

Night Ranger 9"




- 9V 32V
- IP68
- IP69K
- 3Yrs

- Ultimate illumination – 20,400lm.
- Latest high output LED technology.
- LED position light can be switched to white or amber.
- Stainless steel mounting brackets.
- Impact resistant lens.
- Environmentally sealed aluminium body – IP68, IP69K.
- Multi-voltage.
- 3-year warranty.


Operational Voltage :	9–32V
Max. Power Consumption :	144W
Lens :	Polycarbonate
Body :	Aluminium
Bracket :	Stainless Steel
Mount :	Single Bolt M12
Weight :	2.5kg
Cable Length :	500mm
Light Source :	24 x CREE 6W LEDs
LED Colour Temperature :	6000K
Operating Temperature :	-20°C to 45°C
Ingress Protection :	IP68, IP69K
Approvals :	ECE R10, ECE R148, R149 CE, RoHS, CISPR25 CLASS3



LED position light can be switched to white or amber

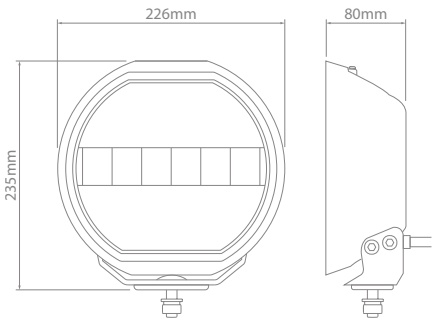

IONNIC LED Driving Lights

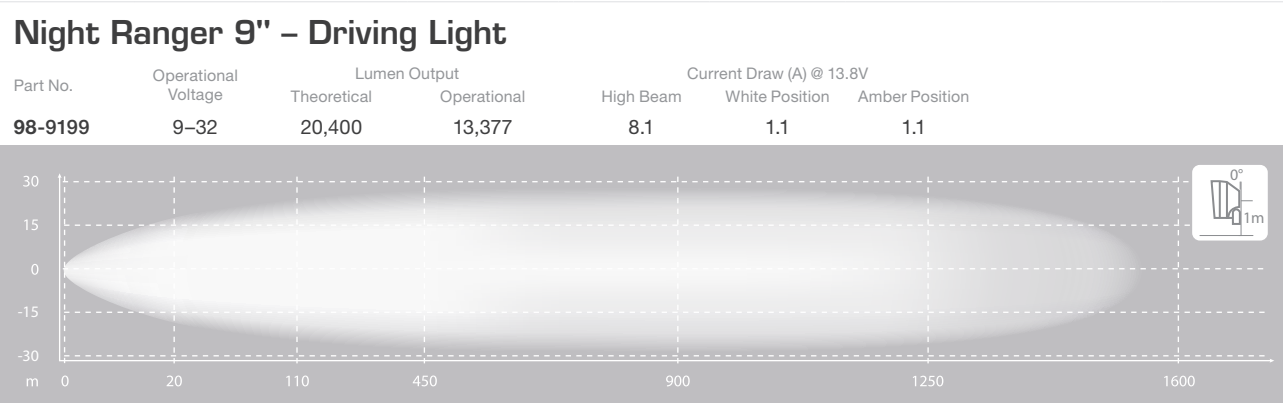

IONNIC LED Driving Lights

Night Ranger 7"



9V
32V

IP68

IP69K



3Yrs

- LED position lights can be switched to white or amber.
- Latest high output LED technology.
- Stainless steel mounting brackets.
- Impact resistant lens.
- Environmentally sealed aluminium body – IP68, IP69K.
- Multi-voltage.
- 3-year warranty.

Operational Voltage :	9–32V
Max. Power Consumption :	108W
Lens :	Polycarbonate
Body :	Aluminium
Bracket :	Stainless Steel
Mount :	Single Bolt M10
Weight :	1.7kg
Cable Length :	500mm
Light Source :	18 x CREE 6W LEDs
LED Colour Temperature :	6000K
Operating Temperature :	-20°C to 45°C
Ingress Protection :	IP68, IP69K
Approvals :	ECE R10, ECE R148, R149 CE, RoHS, CISPR25 CLASS3




LED position light can be switched to white or amber



Night Ranger 7" – Driving Light

Part No.	Operational Voltage	Lumen Output		Current Draw (A) @ 13.8V		
		Theoretical	Operational	High Beam	White Position	Amber Position
98-9197	9–32	9,600	6,467	4.9	0.8	1.1

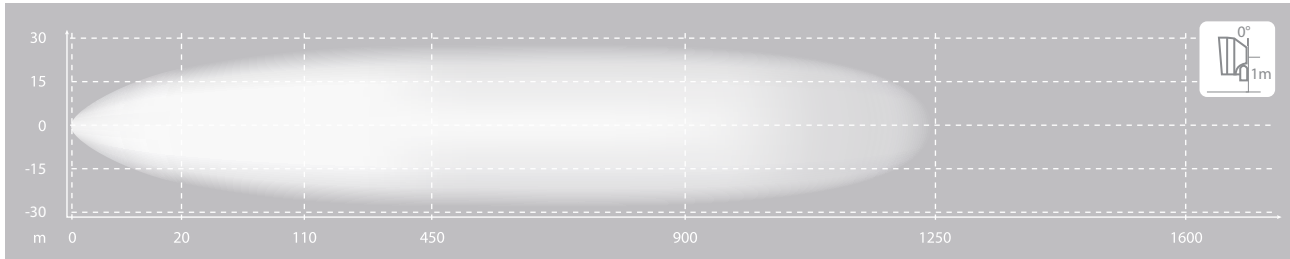

IONNIC LED Driving Lights

- LED position lights can be switched to white or amber.
- Latest high output LED technology.
- Supplied with side & rear stainless steel mounting brackets.
- Mounting channel runs entire length of bar allowing flexible mounting options.
- Impact resistant lens.
- Environmentally sealed aluminium body – IP68, IP69K.
- Multi-voltage.
- 3-year warranty.

Night Ranger SR



Operational Voltage : 10–30V
 Max. Power Consumption : 95W
 Lens : Polycarbonate
 Body : Aluminium
 Bracket : Stainless Steel
 Mount : 2 x M8 Bolt
 Weight : 1.5kg
 Cable Length : 500mm
 Light Source : 21 x Osram 5W LEDs
 LED Colour Temperature : 5700K
 Operating Temperature : -20°C to 45°C
 Ingress Protection : IP68, IP69K
 Approvals : CE, RoHS, ECE R10, ECE R148, R149



10V 30V IP68 IP69K 3Yrs

Supplied with side & rear mounting brackets




LED position light can be switched to white or amber

Mounting channel runs entire length of bar allowing flexible mounting options

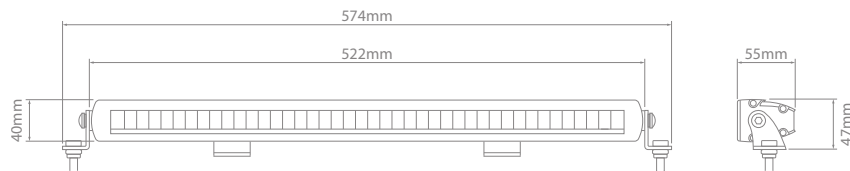


Night Ranger SR – Single Row

Part No.	Operational Voltage	Lumen Output		Current Draw (A) @ 13.8V		
		Theoretical	Operational	High Beam	White Position	Amber Position
98-9171	10–30	8,820	6,332	6.2	0.5	0.5

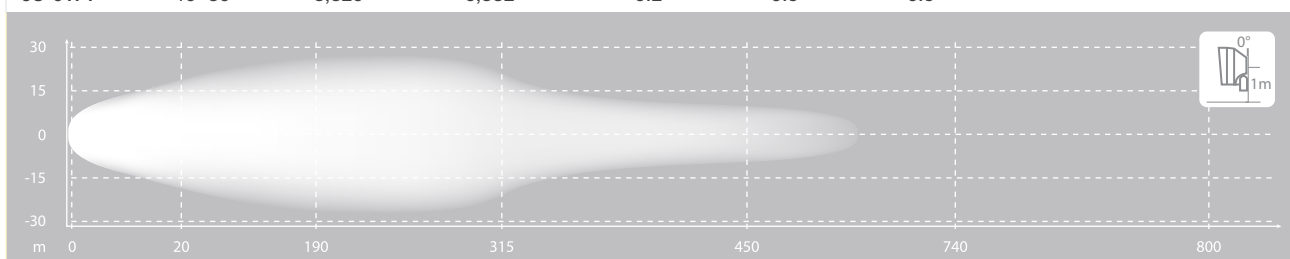

IONNIC LED Driving Lights

Night Ranger DR

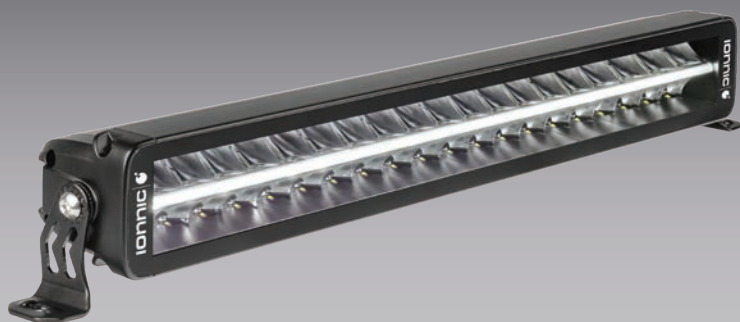

- Ultimate illumination – 16,800lm.
- Latest high output LED technology.
- LED position lights can be switched to white or amber.
- Supplied with side & rear stainless steel mounting brackets.
- Mounting channel runs entire length of bar allowing flexible mounting options.
- Impact resistant lens.
- Environmentally sealed aluminium body – IP68, IP69K.
- Multi-voltage.
- 3-year warranty.

Operational Voltage :	10–30V
Max. Power Consumption :	214W
Lens :	Polycarbonate
Body :	Aluminium
Bracket :	Stainless Steel
Mount :	2 x M8 Bolt
Weight :	2.5kg
Cable Length :	500mm
Light Source :	40 x Osram 5W LEDs
LED Colour Temperature :	5700K
Operating Temperature :	-20°C to 45°C
Ingress Protection :	IP68, IP69K
Approvals :	CE, RoHS, ECE R10, ECE R148, R149




Supplied with side & rear mounting brackets




LED position light can be switched to white or amber

Mounting channel runs entire length of bar allowing flexible mounting options

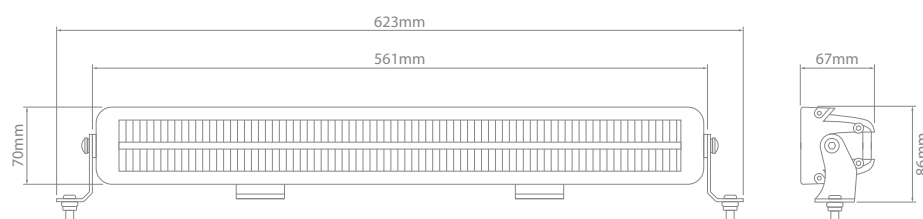

IONNIC LED Driving Lights

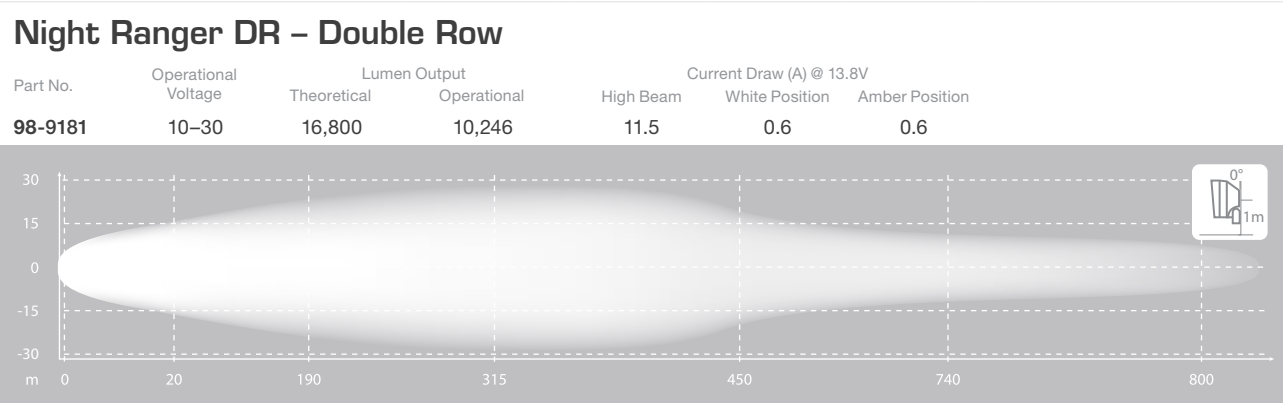



ionnic.com



Lighting | Safety | Electrical