

Switches

- Double pole single throw.
- Multi-voltage.
- Environmentally sealed – IP69K, IP67.
- Integrated lockout on both positions.
- Suitable for high current applications.

880175R



Fixed Handle BMS

Voltage : 12–48V
Current Rating : 500A Continuous
Ingress Protection : IP69K, IP67
Operating Temperature : AC -50 to 85°C
 DC -50 to 105°C



Integrated lockout on both positions




880175R



Integrated lockout on both positions



880175Y

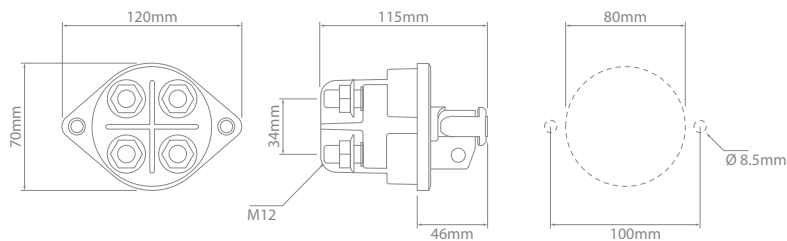

Fixed Handle Battery Master Switches

Part No.	Description	Main Contacts (A)	
		Intermittent	Continuous
880175R	Double Pole – Red handle	3000	500
880175Y	Double Pole – Yellow handle	3000	500

