# J.V. SPEAKER. LED Lighting





7" Headlight

715
Worklamp







Lighting | Safety | Electrical





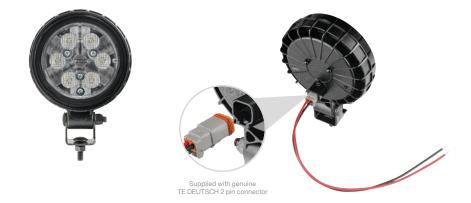









#### 670 XD Worklamp - Flood

Part No. Operational Voltage **1403241** 10–30

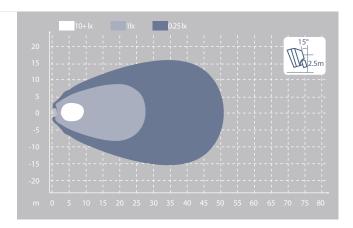

#### 670 XD Worklamp - Trapezoid

Part No. Operational Voltage **1403251** 10–30

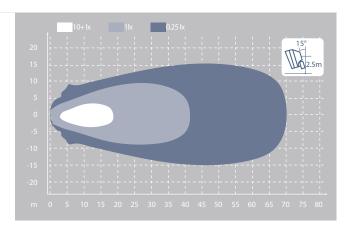





- Multi-voltage.
- Low current draw.
- Environmentally sealed IP67, IP69K.
- Impact resistant polycarbonate lens.
- Robust cast alloy body.
- Internal fully encapsulated for moisture, vibration and corrosion protection.
- TE DEUTSCH compatible connector encapsulated in body.
- Breather filter protects against water and dust ingress.
- Transient spike protected.
- 5-year warranty.
- Made in North America.

Theoretical Lumen Output: 6,372lm 3,800lm Operating Lumen Output: Operational Voltage : Current Draw : 9-30V 4.4A @ 12V DT Style – 2 Pin Connector: Single Bolt M8 Mount: Polycarbonate Lens: Body: Aluminium Weight: 0.4kg Ingress Protection: IP67, IP69K Approvals: ECE R10 Operating Temperature : -40°C to 60°C Colour Temperature : 5050K 18 x LEDs Light Source:



892 Worklamp














Supplied with genuine TE DEUTSCH 2 pin connector








#### 892 Worklamp – Flood

Part No. Operational Voltage **1603961** 9–30

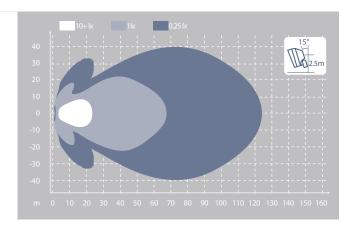





7150 Worklamps

- Multi-voltage.
- Environmentally sealed IP69K.
- Can be steam & pressure cleaned.
- Impact resistant polycarbonate lens.
- Robust cast alloy body.
- TE DEUTSCH compatible connector encapsulated in body.
- Transient spike protected.
- 5-year warranty.
- Made in North America.

5,400lm Theoretical Lumen Output: 4,500lm Operating Lumen Output: Operational Voltage : Current Draw : 10-32V 5.5A @ 12V DT Style – 2 Pin Single Bolt M12 Connector: Mount: Polycarbonate Lens: Body: Aluminium 0.95kg Weight: IP69K Ingress Protection: SAE J1113-13, CISPR 12, CISPR 22 EMC: -40°C to 65°C Operating Temperature : Colour Temperature: 5000K 15 x LEDs Light Source:








Made in North America















# 7150 Worklamp – Flood

Part No. Operational Voltage **1801581** 10–32

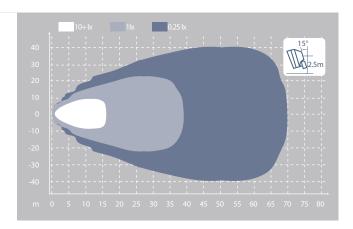

# 7150 Worklamp – Trapezoid

Part No. Operational Voltage **1801571** 10–32

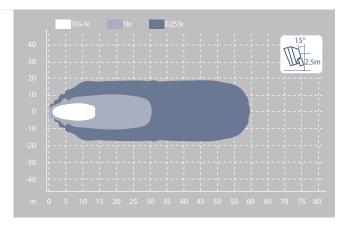



Environmentally sealed – IP69K.

- Impact resistant polycarbonate lens.
- Robust cast alloy body.
- iCONN connector encapsulated in body.
- Transient spike protected.
- 5-year warranty.
- Made in North America.



Theoretical Lumen Output:
Operating Lumen Output:
Operational Voltage:
Current Draw:
Connector:
Mount:
Lens:
Body:
Weight:
Ingress Protection:
Operating Temperature:
Colour Temperature:
Light Source:

9,000lm 5,800lm 16–32V 5A @ 24V iCONN iMATE23 – 2 Pin Single Bolt M10 Polycarbonate Aluminium 2.1kg IP69K -40°C to 65°C 5700K 15 x LEDs




526 Worklamps

















#### 526 Worklamp - Flood

Part No. Operational Voltage **1300581** 16–32

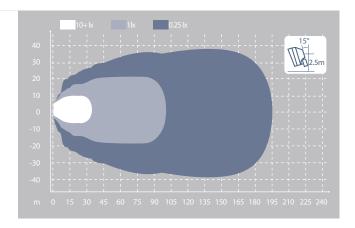

#### 526 Worklamp - Trapezoid

Part No. Operational Voltage **1300591** 16–32

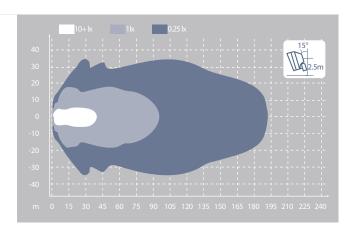

#### 526 Worklamp - Spot







- Rectangular headlight insert incorporating low beam, high beam and park light.
- Heavy duty construction.
- Complies to ADR.
- Meets military standard MIL-PRF-32243.
- Multi-voltage.
- Environmentally sealed IP67.
- UV hard coated polycarbonate lens for high durability in harsh environments.
- Robust cast alloy body.
- Solid state LEDs provide great shock and vibration resistant.
- Breather filter protects against water and dust ingress.
- 5-year warranty.
- Made in North America.

Theoretical Lumen Output: Low Beam 1,850lm 2,100lm High Beam 645lm Low Beam Operating Lumen Output: High Beam 755lm Operational Voltage: 10-30V 1.1A @ 12V Current Draw: Low Beam High Beam 2.1A @ 12V Park Light 0.06A @ 24V 300mm Fly Lead Connector: UV Hard Coated Polycarbonate Lens: Body: Aluminium Weight: 1.1kg Ingress Protection: IP67 Approvals: ECE R7, ECR R112 ADR, MIL-PRF-32243 **Operating Temperature:** -40°C to 65°C Light Source : LED



820 Headlight

00










Made in North America






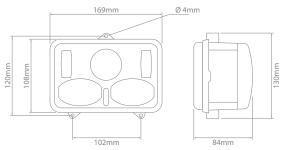





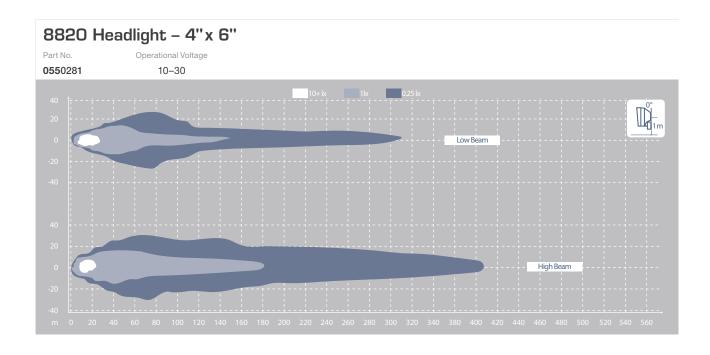







- Standard plug and play 7" round (PAR56) headlight suits wide range of vehicles.
- Integrated low beam, high beam, day time running light and park light.
- · Complies to ADR.
- Dual Burn technology for brighter high beam.
- Multi-voltage.
- Environmentally sealed IP67.
- UV hard coated polycarbonate lens for high durability in harsh environments.
- Robust cast alloy body.
- Solid state LEDs provide great shock and vibration resistance.
- Transient spike protected.
- 5-year warranty.
- Made in North America.

Theoretical Lumen Output: Low Beam 2,340lm High Beam 4,170lm **Operating Lumen Output:** Low Beam 694lm High Beam 1,340lm Operational Voltage: 9-32V Current Draw: Low Beam 2.0A @ 12V 3.6A @ 12V High Beam 0.2A @ 12V Park Light Day Time Running Light 1.6A @ 12V Spike: 150V @ 1Hz 1 x H4, 2 x 6.3mm Blade Terminal Connector: UV Hard Coated Polycarbonate Lens: Body: Aluminium Weight: 1.0kg Ingress Protection: IP67 ADR, ECE R10 Approvals: Operating Temperature: -40°C to 65°C Light Source: LED










Made in North America





Day time running light ON











# 














#### 793 Safety Light

Part No. Operational Voltage 1603761 10–45 1603871 48–110 Colour Current Draw
Red 1.6A @ 12V
Red 0.35A @ 48V

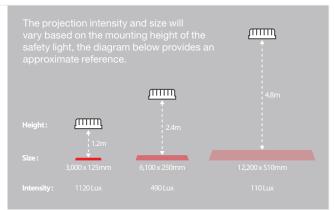




- Safety light with constant & flashing beam.
- Multi-voltage.
- Durable polycarbonate lens.
- Robust cast alloy body.
- Stainless steel mounting bracket.
- Can be steam & pressure cleaned.
- Environmentally sealed IP67, IP69K.
- Transient spike protected.
- Incorporated breather filter protects against water and dust ingress.
- 5-year warranty.
- Made in North America.

Operational Voltage: 9-33V Current Draw: 3.7A @ 12V Connector: DT Style - 3 Pin 1 x M12, 2 x M8 Mount: Polycarbonate Lens: Body: Aluminium Stainless Steel Bracket: Weight: 1.3kg Ingress Protection: IP67, IP69K Approvals : Operating Temperature : UL, ECE R10 -40°C to 65°C





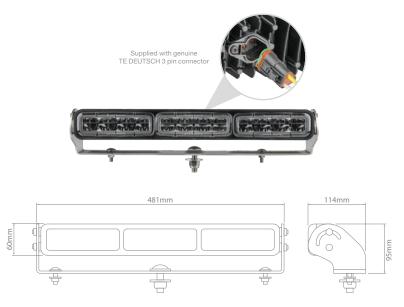

#### 529 Safety Light

Part No. Operational Voltage 1300561

9-33

Colour Red

Flash Rate per Min 60

