





Safety Lights



793 Safety Light 42



529 Safety Light 43


Safety Lights



- High power LEDs.
- Compact design.
- Extensive Multi-voltage.
- Durable polycarbonate lens.
- Robust cast alloy body.
- Stainless steel mounting bracket.
- Can be steam & pressure cleaned.
- Environmentally sealed IP67, IP69K.
- Incorporated breather filter protects against water and dust ingress.
- 5-year warranty.
- Made in North America.

Connector:
Mount:
Lens:
Body:
Bracket:
Weight:
Ingress Protection:
Approvals:
Operating Temperature:

DT Style – 2 Pin Single Bolt M8 Polycarbonate Aluminium Stainless Steel 0.4kg IP67, IP69K UL, ECE R10 -40°C to 65°C



Made in North America




793 Safety Light

Part No. Operational Voltage 1603761 10–45 1603871 48–110

 Colour
 Current Draw

 Red
 1.6A @ 12V

 Red
 0.35A @ 48V

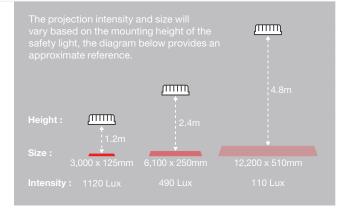

Safety Lights

- · Constant or flashing modes.
- Multi-voltage.
- Durable polycarbonate lens.
- Robust cast alloy body.
- Stainless steel mounting bracket.
- Can be steam & pressure cleaned.
- Environmentally sealed IP67, IP69K.
- Transient spike protected.
- Incorporated breather filter protects against water and dust ingress.
- 5-year warranty.
- Made in North America.

Operational Voltage: 9-33V Current Draw: 3.7A @ 12V Connector: DT Style - 3 Pin 1 x M12, 2 x M8 Mount: Polycarbonate Lens: Body: Aluminium Stainless Steel Bracket: Weight: 1.3kg IP67, IP69K UL, ECE R10 Ingress Protection: Approvals : Operating Temperature : -40°C to 65°C














529 Safety Light




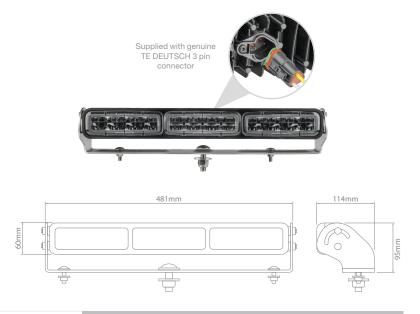

529 Safety Light

Part No. 1300561 Operational Voltage 9-33

Flash Rate per Min 60





43

Colour Red