

Switches

- Vandal resistant momentary or latching switches.
- Pre-wired.
- Epoxy filled base for enhanced moisture & vibration protection.
- Ring style illumination.
- Highly impact resistant.
- Multi-voltage.
- Environmentally sealed – IP65.
- Variety of illumination colours available.
- Double pole model – L16P-RR-DC.




L16P-RR-DC



L22P-RB


Vandal Resistant – Pre-wired

Voltage : 12–24V
Body : Stainless Steel
Light Source : LED
Cable Length : 300mm
Ingress Protection : IP65
Approvals : RoHS
Operating Temperature : -20°C to 55°C

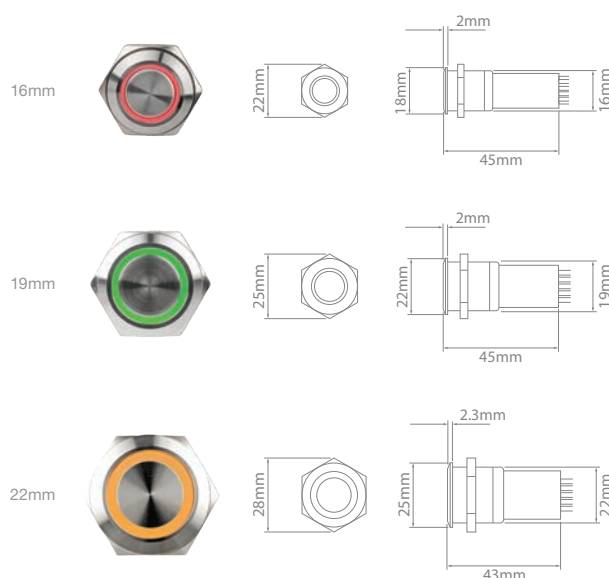


Epoxy filled for enhanced moisture & vibration protection

Single Pole



Double Pole



Switches – Vandal Resistant – Pre-wired

Size (mm)	Max. Panel Thickness (mm)	Action	Contact Configuration	Pole	Red	Green	Amber	Blue
16	12	Momentary	N/O & N/C	Single Pole	L16P-RR	L16P-RG	L16P-RA	L16P-RB
				Double Pole	L16P-RR-DC	—	—	—
19	10	Momentary Latching	N/O & N/C	Single Pole	L19P-RR	L19P-RG	L19P-RA	L19P-RB
					—	—	—	L19P-RB-L
22	8	Momentary	N/O & N/C	Single Pole	L22P-RR	L22P-RG	L22P-RA	L22P-RB

