





Sirens & Intercoms

Siren Amplifiers & PA

72

Siren Speaker

74

Motorised Sirens

75

BACKCHAT Intercom

76

Sirens & Intercoms

Siren Amplifiers & PA




SA500-12


- Up to 5 tones available.
- Horn activated tone changing.
- Public address on all models.
- Radio re-broadcast on selected models.
- Softstart on Remote Head units.
- 12 & 24V models.




Control up to 8 individual lighting functions. Program the ALERT key to activate any combination of lights with a siren tone.

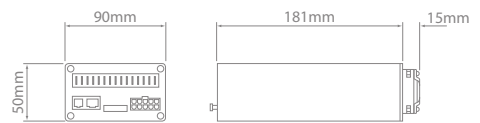

ECU



Microphone




Control Pad


Siren Amplifier & PA – Remote Head with Control Pad – 100 Watt

Part No.	Voltage	Features	Tones
809-001	12	<ul style="list-style-type: none"> • Public Address • Radio Re-Broadcast • Park Kill • Horn Ring Cycler 	<ul style="list-style-type: none"> • Wail • Yelp • Hi-Low
809-002	24	<ul style="list-style-type: none"> • Manual Setting • Soft Start Siren • Manual Wail • Control Pad with 8 x lighting control 	<ul style="list-style-type: none"> • Phaser • Air Horn


Sirens & Intercoms

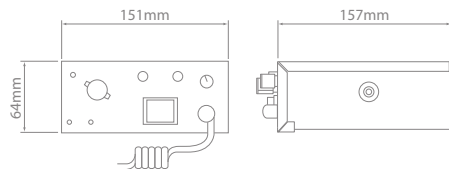


SA500-12



Microphone

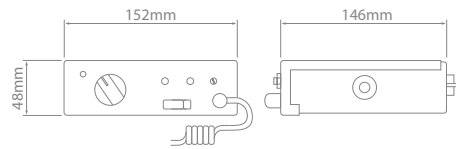

SS670

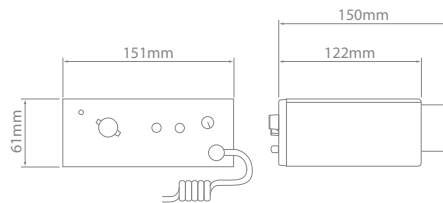

SS700-24



ECU

Siren Amplifier & PA – 100 Watt

Part No.	Voltage	Features	Tones
SA500-12	12	<ul style="list-style-type: none"> Public Address Radio Re-Broadcast Auxiliary Input Park Kill Horn Ring Cycler Manual & Alert Settings 	<ul style="list-style-type: none"> Wail Yelp Phaser Air Horn
SS670	12		
SS700-24	24		



Sirens & Intercoms


Siren Speaker



- Universal mount polycarbonate siren speaker.
- Suitable for use with all IONNIC amplifiers.

Body :
Weight :

Polycarbonate
3.0kg

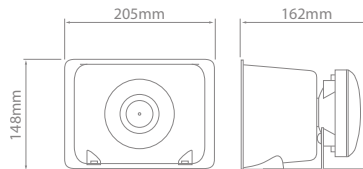


Siren Speaker – Polycarbonate

Part No.	Watts	Impedance (Ohm)
TC100H	100	11

- Motor driven.
- Polycarbonate construction.
- Double insulated.
- 12 & 24V models.



Duty Cycle : Continuous
Sound Output : 114dB @ 1m
Frequency : 820Hz
Body : Polycarbonate
Weight : 1.5kg
Approvals : CE, C-Tick
Operating Temperature : -40°C to 40°C
Ingress Protection : IP43

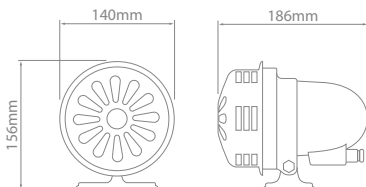

Motorised Siren

Part No.	Voltage	Current Rating (A)
SIR4501210	12	9.5
SIR4502410	24	5.0



Sirens & Intercoms

BACKCHAT Intercom



BCVI-2

- Voice activated or push to talk models.
- 3 way communication using Duplex kit + Slave.
- Solid state, spark free electronics.
- Environmentally sealed – IP68.
- Epoxy filled for maximum vibration resistance.
- Can be steam & pressure cleaned.
- Multi-voltage.
- 2 year warranty.




Voltage :	12–24V
Current Draw :	0.5A
Volume Control :	80–95dB(A)
Body :	AES
Harness :	25m
Weight :	Master 0.3kg
	Slave 0.27kg
EMC :	CE, ECE R10, FCC & 'e' marked
Operating Temperature :	-40°C to 85°C
Ingress Protection :	IP68



BCVI



BCVI-2

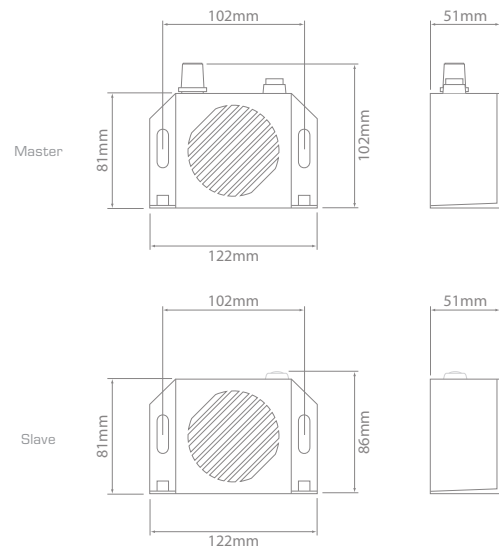

BACKCHAT Intercom

Part No.	Description
BCVI	Simplex Kit – Master Unit with Voice Activated Slave Unit
BCVI-2	Duplex Kit – Master Unit with Push-to-talk Slave Unit
BCVI-SLAVE	Slave Unit – Voice Activated
BCVI-2-SLAVE	Slave Unit – Push to Talk