

Circuit Protection


- FH602 & FH603 kits can seal to IP67 when used with a Microplex CAN Controller or 280 series relays.
- Bases can be linked together using interconnecting guides.
- Kits supplied with all required components including contacts, seals and cavity plugs.
- Locking bracket can be easily released – no tools required.
- 12 cavity mounting bases suiting 2.8mm blade size.
- Suitable for Mini (ATM) fuses & circuit breakers, 280 series micro relays, and IONNIC's Microplex CAN Controllers.
- Made in Europe.



Fuse & Relay Holder Kits

Made in Europe

Housing : PA66 Nylon
 Ingress Protection : FH602-KIT, FH603-KIT IP67
 Melting Temperature : 260°C

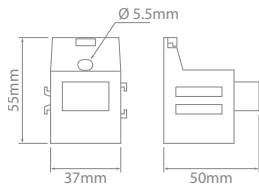

Bases feature interconnecting guides allowing bases to be easily joined



Watertight seal included in the FH602 & FH603 kits



Watch video



Watch a hands-on video showcasing the holders and kit combinations. See more product videos on the ionnic YouTube channel.

Shown with a Microplex CAN Controller mounted securely. For more info on IONNIC's Microplex CAN Controllers visit ionnic.com or contact your nearest reseller.


Shown with 2 x micro 280 series relays mounted securely




Shown with fuses, circuit breaker and 280 Series relay



FH601-KIT

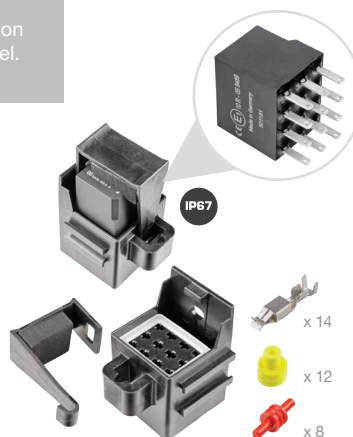

FH602-KIT

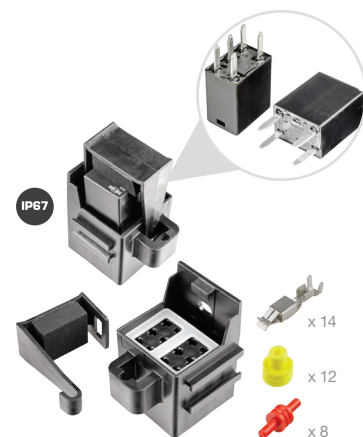

FH603-KIT

Fuse & Relay Holder Kits – 600 Series

FH601-KIT



- 1 x Mounting Base
- 14 x Contacts (925590-2)
- 12 x Wire Seal (281934-2)

FH602-KIT



- 1 x Mounting Base
- 1 x Seal
- 1 x Locking Bracket
- 14 x Contacts (925590-2)
- 12 x Wire Seal (281934-2)
- 8 x Cavity Plug (WS1008)

FH603-KIT



- 1 x Mounting Base
- 1 x Seal – Twin
- 1 x Locking Bracket
- 14 x Contacts (925590-2)
- 12 x Wire Seal (281934-2)
- 8 x Cavity Plug (WS1008)



Circuit Protection



927779-3



925590-2



WS1009




WS1007




281934-2



WS1008

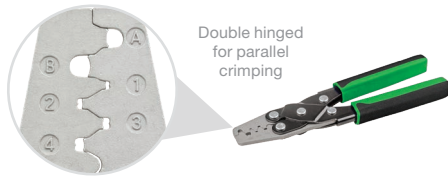

HT-4300

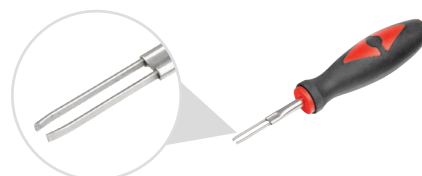

HT-4308

Fuse & Relay Holder Kits – Accessories

Part No.	Description	Blade Size (mm)	Wire Size (mm ²)	Cable O.D. Range (mm)	Pack Qty
927779-3/100	Contacts	2.8	0.5 – 1.0	1.4 – 2.3	100
925590-2/10	Contacts	2.8	1.5 – 2.5	2.0 – 3.0	10
WS1009/100	Wire Seal – Ø 5.2mm. Blue			1.2 – 1.7	100
WS1007/100	Wire Seal – Ø 5.2mm. Red			2.2 – 2.85	100
281934-2/100	Wire Seal – Ø 5.7mm. Yellow			1.7 – 2.4	100
WS1008/100	Cavity Plug – Ø 5.2mm. Burgundy			—	100
HT-4300	Crimper – 0.35, 0.5–0.8, 1.0–2.0, 3.0mm ²				
HT-4308	Contact remover				



MF5/10



MF10/10



MF15/10



CB233-15



CB233-20

PB1412RMC & PB1424RMC are only compatible with FH601-KIT



PB1412RMC
PB1424RMC



PB1512RMC
PB1524RMC



PB2512RMC
PB2524RMC

For the complete range of Mini (ATM) Blade Fuses & Circuit Breakers see the **Electrical Wiring Accessories 2021** catalogue.



Download at ionnic.com or contact your nearest reseller.

Fuses – Mini (ATM)

	2A Grey	3A Purple	4A Pink	5A Orange	7.5A Brown	10A Red	15A Blue	20A Yellow	25A Clear	30A Green
Pack Qty – 10	MF2/10	MF3/10	MF4/10	MF5/10	MF7.5/10	MF10/10	MF15/10	MF20/10	MF25/10	MF30/10

Circuit Breakers – Mini (ATM)

	5A Tan	7.5A Brown	10A Red	15A Blue	20A Yellow	25A White	30A Green
Pack Qty – 1	CB233-5	CB233-7.5	CB233-10	CB233-15	CB233-20	CB233-25	CB233-30

Relays – Micro – 280 Series

	N/O 4 Terminal		N/O 4 Terminal		C/O 5 Terminal	
	12V 20A	24V 10A	12V 20A	24V 15A	12V 20A	24V 10A
12V	*PB1412RMC	*PB1424RMC	PB1512RMC	PB1524RMC	PB2512RMC	PB2524RMC

* Only compatible with FH601-KIT.