


DEUTSCH - DT Series

Flange Mount Kits

- Kits now available with the DT Series Flange Mount receptacles.
- Each Kit contains all components required to make both sides of a connection.
- Environmentally sealed – IP68, IP6K9K, when installed to manufacturer's specifications.
- 2, 3, 4, 6, 8 and 12 cavity arrangements.
- Latched mating.
- Accepts size 16 contacts, each with 13A continuous capacity.

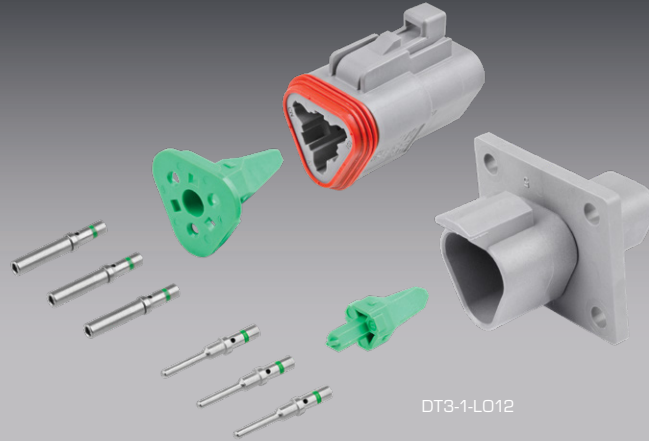



DT3-1-L012



Housing : Thermoplastic
Seal : Silicon Rubber
Wedgelock : Thermoplastic
Contact Size : 16
Contact Rating : 13A @ 125°C
Shock : 50G
Vibration : 20G rms 10 – 2000Hz
Approvals : 20mm Flame Test per Standard UL-94
Ingress Protection : IP68, IP6K9K
Operating Temperature : -55°C to 125°C

Green Band Size 16 Contacts

Contacts with the **Green Band** marking accept the larger wire size of AWG14 / 1.0 – 2.0mm².



DT12-1-L012



DT Series – Kits – Flange Mount (L012)

Contact Type	Contact Size	No. of Cavities					
		2	3	4	6	8	12
Solid – Green Band	16	DT2-1-L012	DT3-1-L012	DT4-1-L012	DT6-1-L012	DT8-1-L012	DT12-1-L012

- Kits Content:**
- 1 x Receptacle & Wedgelock
 - 1 x Plug & Wedgelock
 - Contacts – Pin
 - Contacts – Socket



Accessories – Gaskets

		No. of Cavities				
2	3	4	6	8	12	
—	DT3P-L012-GKT	DT4P-L012-GKT	—	DT8P-L012-GKT	DT12P-L012-GKT	



DEUTSCH

