


Electronics

- IONNIC 2 output 5V Voltage Regulator conveniently housed in a TE Connectivity – DEUTSCH DT Series 4 contact receptacle.
- Ideal for use with sensors and small electronic devices.
- 9–36V input.
- 2 x 5V outputs.
- 150mA maximum combined output.
- Reverse polarity protected.
- Mates with DEUTSCH DTO6-4S plug.
- Gold plated size 16 contacts.
- Environmentally sealed – IP68, IP6K9K, when installed to manufacturer's specifications.

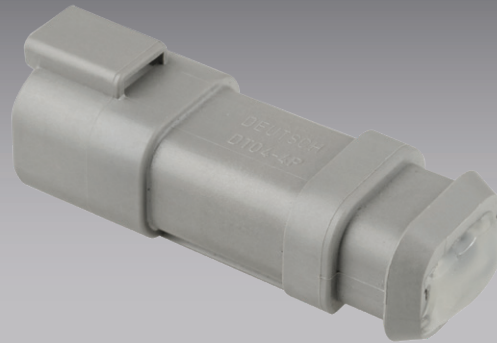

IONNIC 5V Regulator


Housing :
Wedgeloock :

Thermoplastic
Thermoplastic



Reverse polarity protected.
Recommended to also install a 1A (maximum) fuse to the 9–32VDC input.
Do not remove ground supply while device is powered or damage to the device can occur.

- Pin 1 – Input (9–32VDC), fused to 1A (maximum)
- Pin 2 – Output 1 (5VDC)
- Pin 3 – Output 2 (5VDC)
- Pin 4 – Ground

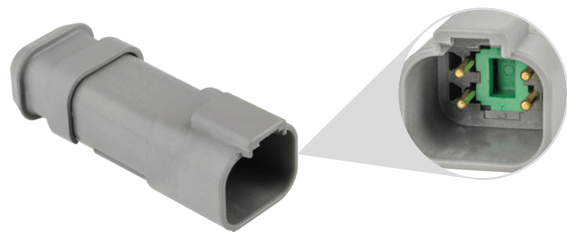

IONNIC 5V Regulator

Part No.	Voltage	Output Voltage	Outputs
DT04-4P-5V	9–32V	2 x 5V	2 (150mA Combined)

IONNIC

For details of your nearest reseller free call : 1800 724 690 | www.ionnic.com

